







TE CGP55B01		 TE CGP55B01X TE CGP55B01Y
边 框		
壁厚 (mm)	理论重 (Kg/m)	
1.4	0.915	


TE CGP55B02B		 TE CGP55B02BX TE CGP55B02BY
中 挺		
壁厚 (mm)	理论重 (Kg/m)	
1.4	1.203	


TE CGP55B01F		 TE CGP55B01FX TE CGP55B01FY
边 框		
壁厚 (mm)	理论重 (Kg/m)	
1.4	1.005	


TE CGP55B02E		 TE CGP55B02AX TE CGP55B02EY
加强中挺		
壁厚 (mm)	理论重 (Kg/m)	
1.4	1.522	


TE CGP55B01K		 TE CGP55B01KX TE CGP55B01KY 未开模	
边框			
壁厚 (mm)	理论重 (Kg/m)		
1.4	0.912		



TE CGP55B02F		 TE CGP55B02AX TE CGP55B02AY	
中挺			
壁厚 (mm)	理论重 (Kg/m)		
1.4	1.141		



TE CGP55B02		 TE CGP55B02X TE CGP55B02Y	
中 挺			
壁厚 (mm)	理论重 (Kg/m)		
1.4	1.072		



TE CGP55B02K		 TE CGP55B02KX TE CGP55B02KY	
中 挺			
壁厚 (mm)	理论重 (Kg/m)		
1.4	1.009		

TE CGP55B02A		 TE CGP55B02AX TE CGP55B02AY	
中 挺			
壁厚 (mm)	理论重 (Kg/m)		
1.4	1.123		



TE CGP55B22		 TE CGP55B22X TE CGP55B22X	
Z 挺			
壁厚 (mm)	理论重 (Kg/m)		
1.40	1.104		



TE CGP55B03B				TE CGP55B06			
内开扇				90°转角			
壁厚 (mm)	理论重 (Kg/m)			壁厚 (mm)	理论重 (Kg/m)		
1.40	1.095			1.4	1.317		

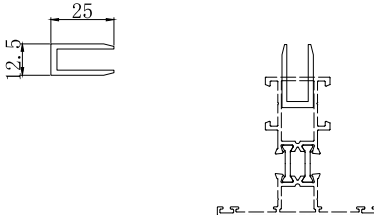
TE CGP55B04B				TE CGP55B36			
外开扇				转角框			
壁厚 (mm)	理论重 (Kg/m)			壁厚 (mm)	理论重 (Kg/m)		
1.4	1.278			1.4	1.511		

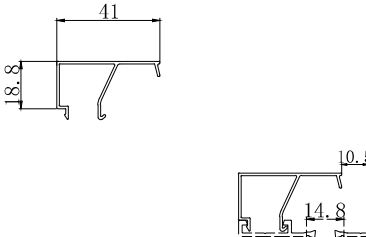
TE CGP55B04C				TE CGP55B51			
外开扇				拼接框			
壁厚 (mm)	理论重 (Kg/m)			壁厚 (mm)	理论重 (Kg/m)		
1.4	1.179			1.40	0.906		


李尧 0.721+0.380+0.039*2



TE CGP55B05				TE CGP55B07			
转换框				拼条			
壁厚 (mm)	理论重 (Kg/m)			壁厚 (mm)	理论重 (Kg/m)		
1.4	0.852			1.4	0.093		


TE CGP55B05A				TE CGP55E17			
转换框				拼板			
壁厚 (mm)	理论重 (Kg/m)			壁厚 (mm)	理论重 (Kg/m)		
1.4	0.890			1.6	0.421		



TE ZL014		
中挺连接件		
壁厚 (mm)	理论重 (Kg/m)	
2.0	0.317	


TE YX217		
单玻压线		
壁厚 (mm)	理论重 (Kg/m)	
1.0	0.267	



TE ZL013		
中挺连接件		
壁厚 (mm)	理论重 (Kg/m)	
1.5	0.237	


TE YX206		
双玻压线		
壁厚 (mm)	理论重 (Kg/m)	
1.0	0.179	


TE JM102		
角 码		
壁厚 (mm)	理论重 (Kg/m)	
	2.225	

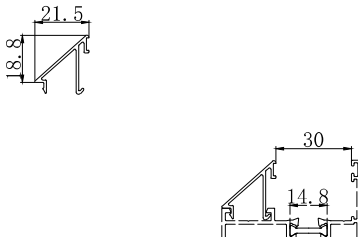
TE YX208		
双玻压线		
壁厚 (mm)	理论重 (Kg/m)	
1.0	0.232	



TE JM120		
角 码		
壁厚 (mm)	理论重 (Kg/m)	
2.5	1.611	


TE YX210		
压 线		
壁厚 (mm)	理论重 (Kg/m)	
1.0	0.221	

TE JM104		
角 码		
壁厚 (mm)	理论重 (Kg/m)	
2.5	1.932	

TE YX209		
双玻压线		
壁厚 (mm)	理论重 (Kg/m)	
1.0	0.217	

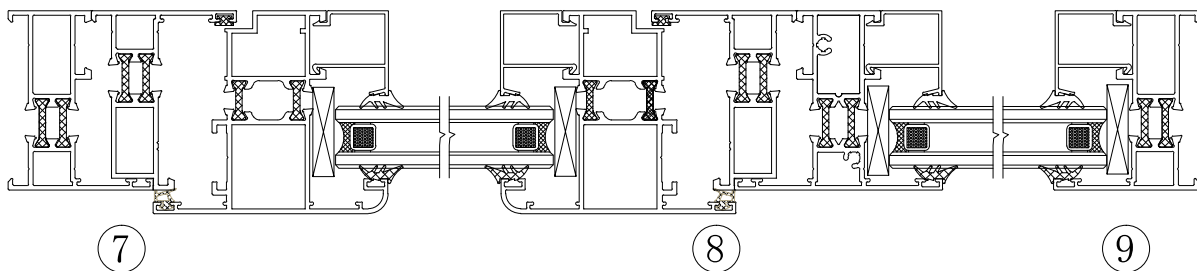
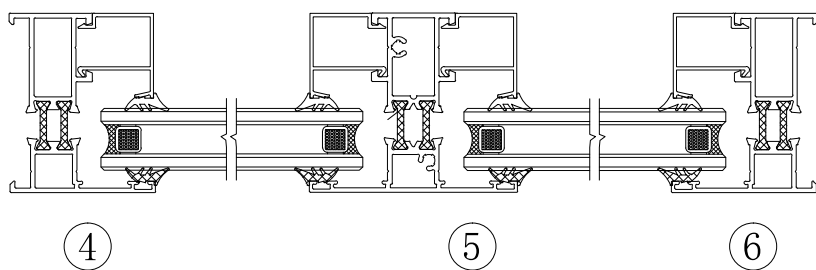
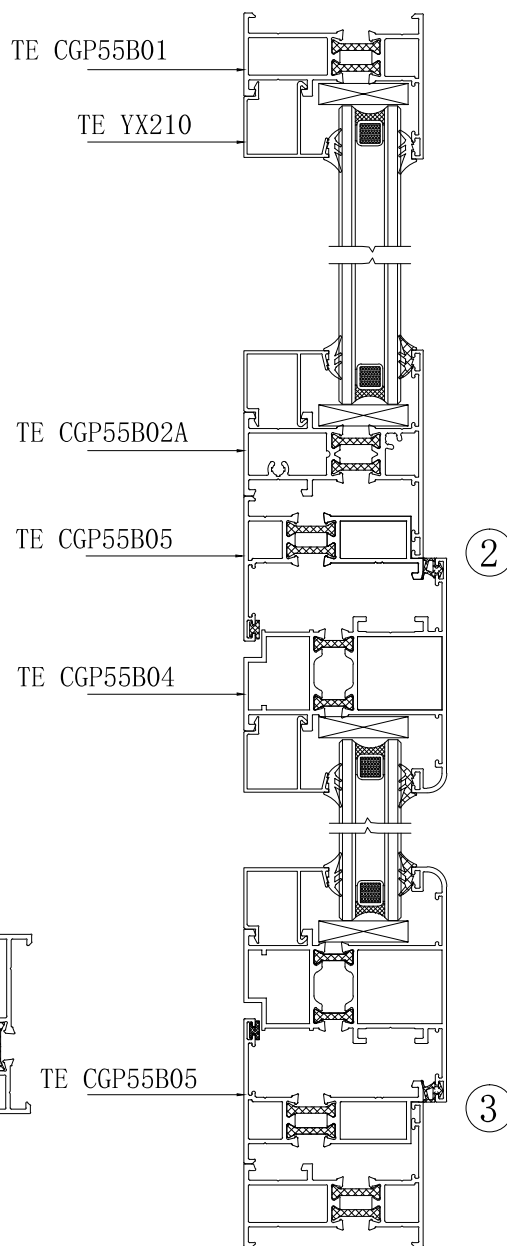
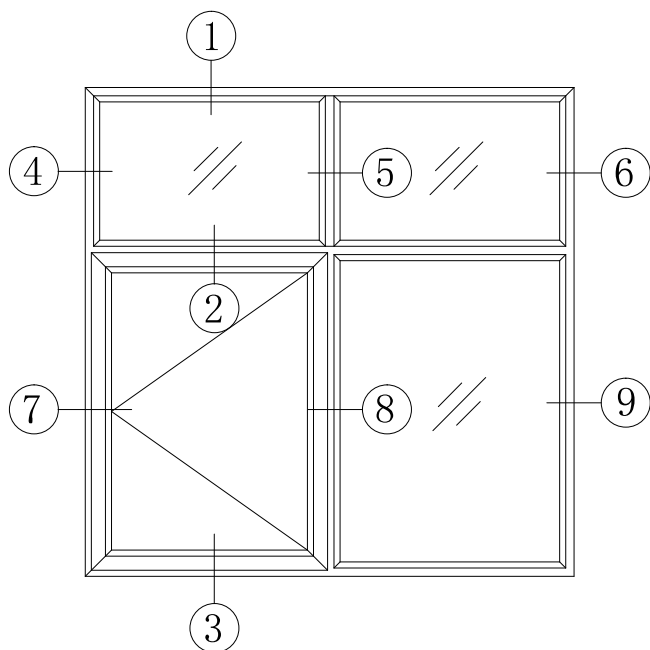
TE YX207					
双玻压线					
壁厚 (mm)	理论重 (Kg/m)		壁厚 (mm)	理论重 (Kg/m)	
1.0	0.174				

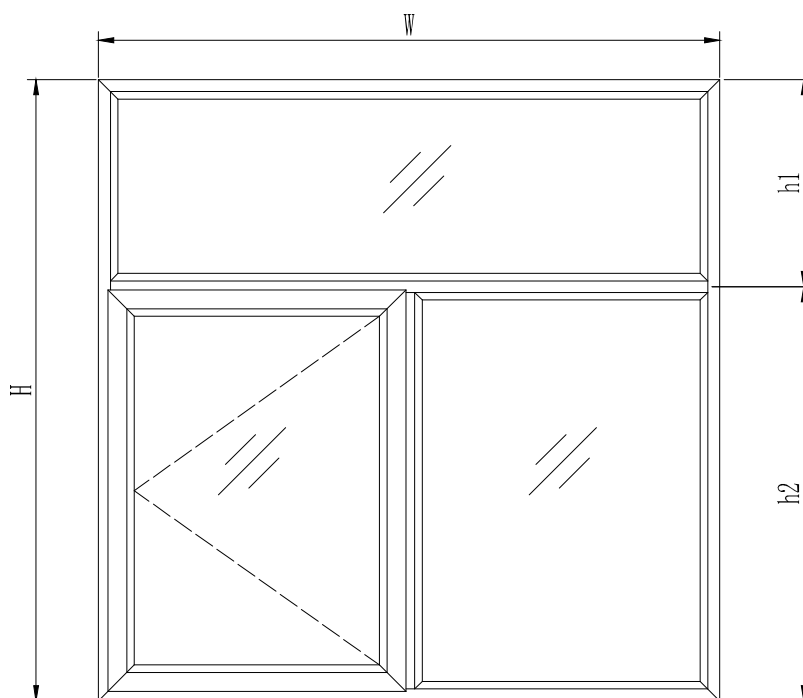
TE YX077				
压 线				
壁厚 (mm)	理论重 (Kg/m)			
1.0	0.177			

TE YX226				
压 线				
壁厚 (mm)	理论重 (Kg/m)			
1.0	0.167			

壁厚 (mm)	理论重 (Kg/m)			壁厚 (mm)	理论重 (Kg/m)	

壁厚 (mm)	理论重 (Kg/m)			壁厚 (mm)	理论重 (Kg/m)





H=1500, H1=500, H2=1000, W=1500

用料清单							
序号	名称	型号	壁厚mm	米重Kg/M	下料尺寸mm	支数	总重量Kg
1	竖框	TE CGP55B01	1.4	0.915	1500.0	2	2.745
2	横框	TE CGP55B01	1.4	0.915	1500.0	2	2.745
3	竖中梃	TE CGP55B02A	1.4	1.123	971.6	1	1.091
4	横中梃	TE CGP55B02A	1.4	1.123	1459.0	1	1.638
5	上固压线竖	TE YX210	1.0	0.221	461.6	2	0.204
6	上固压线横	TE YX210	1.0	0.221	1449.0	2	0.640
7	边固压线竖	TE YX210	1.0	0.221	961.6	2	0.425
8	边固压线横	TE YX210	1.0	0.221	711.6	2	0.315
9	转换框	TE CGP55B05	1.4	0.852	961.6	2	1.639
10	转换框	TE CGP55B05	1.4	0.852	711.6	2	1.213
11	竖扇	TE CGP55B04B	1.4	1.095	923.6	2	2.023
12	横扇	TE CGP55B04B	1.4	1.095	673.6	2	1.475
13	竖扇压线	TE YX210	1.0	0.221	824.0	2	0.364
14	横扇压线	TE YX210	1.0	0.221	574.0	2	0.254
15	框角码	TE JM120	2.5	1.611	24.2	4	0.156
16	框角码	TE JM120	2.5	1.611	10.4	4	0.067
17	扇角码	TE JM120	2.5	1.611	8.4	4	0.054
18	扇角码	TE JM120	2.5	1.611	23.5	4	0.151
19	转换框角码	TE JM120	2.5	1.611	10.4	4	0.067
20	转换框角码	TE JM120	2.5	1.611	20.3	4	0.131
21	合计						17.397
22	每平方米用料						7.732